

The following illustrates the steps necessary to install the Delta III Lighted Marquee (PN: 82-3056-01) to front of the unit's shroud.

⚠ WARNING

Ensure dispenser is disconnected from power source before beginning this procedure.

⚠ ATTENTION

Take care not to scratch outer shroud cover or sides of bonnet during removal and installation procedures.

Removal of Bonnet from Dispenser


1. Open Shroud Cover.
2. Remove three (3) screws that fasten the shroud to the bonnet.
3. Remove Bonnet and place it with grill side up on a smooth surface.
4. Lower Shroud Cover to its closed position.

NOTE

DO NOT discard screws, retain for reinstallation.

Installation of Marquee

1. Carefully remove the existing decal from the front of the Shroud. Note that any residual adhesive from the old decal will not need to be removed. The new marquee will cover this area.
2. Feed black and white wire leads from the Marquee Assembly through the rectangular cutout on the front of the shroud.
3. Place the Marquee onto the front of the Shroud, lining up the three (3) studs from the reflector plate to the three (3) holes in the front of the shroud
4. Locate the three (3) 10-24 hex nuts (PN 04-0286) in the provided hardware bag. Carefully lift the front of the Shroud to the open position and secure the three (3) studs with the three (3) 10-24 hex nuts, fastening the Marquee to the Shroud. Leave shroud in the open position.
5. Locate Nylon Plug Housing (PN 11-0015) in hardware bag. Insert white lead into position 1 of Plug Housing and insert black lead into Position 2.
6. Disconnect secondary leads on transformer (load side).
7. Locate the Lead Extension Assembly (PN 52-2113/01) in the hardware bag.
8. Connect the duplex leads to the secondary terminals of the Transformer.

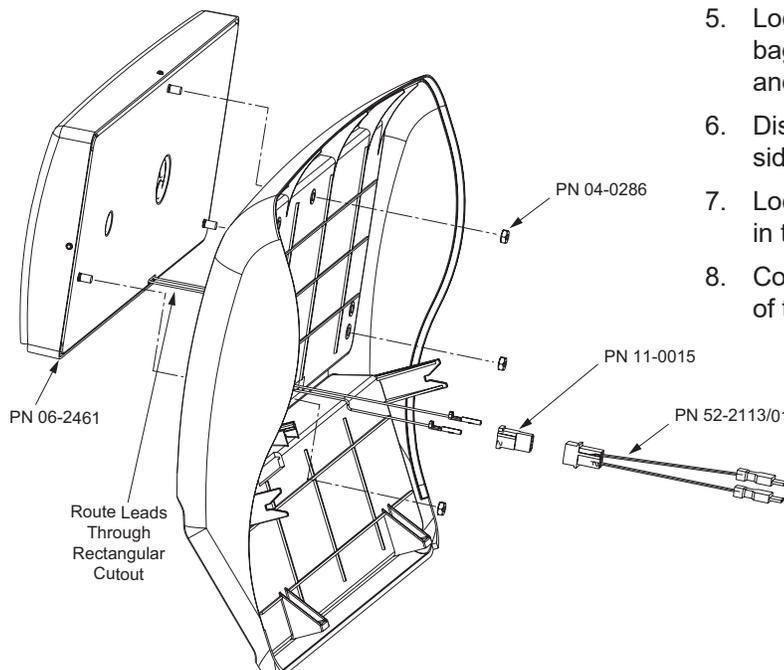

9. Reconnect the leads from the key switch to the piggy-back connections on the Lead Extension Assembly.
10. Plug the Lead Extension Assembly into the Plug Housing from the Marquee.
11. Route all leads away from any rotating equipment. Secure leads with tie-wraps if necessary.
12. Lower bonnet into position, taking care not to pinch any leads.
13. Plug in power supply to unit. Verify that the connections are secure and that the lights operate correctly.
14. Reinstall the three (3) screws (removed in Step 2) into the back panel of the shroud to fasten down the bonnet and lower shroud cover to closed position.

Replacing Light Bulbs in Lighted Marquee

1. Open Shroud Cover
2. Disconnect Marquee Harness from the Extension Harness Assembly (PN 52-2113/01).
3. Remove the three (3) nuts (PN 04-0286) that are holding the Marquee Assembly to the front of the shroud.
4. Carefully lower the Shroud Cover while holding the Marquee Assembly.
5. Pull the Marquee Assembly away from the shroud and lay flat on top of the Bonnet. Take care not to scratch the bonnet with studs in Marquee Assembly.
6. The Marquee lens is held to the Reflector Plate by four (4) plastic rivets (PN 04-1269). Using a knife or similar instrument, carefully remove the four (4) rivet heads by pulling out slowly.
7. Once pulled out, the rivet head and body can be removed from the Marquee lens. Set aside for re-installation.
8. Remove the lens and replace light bulb(s).
9. Reassembly the lens onto the Reflector Plate and fasten Marquee Assembly and Extension Harness Assembly back in place.
10. Plug in power supply to the unit. Verify that connections are secure and that lights operate correctly.

