

LANCER®

STUBBORN CRAFT DISPENSER - ADA PANEL SERVICE

Instruction Sheet




PN 28-0949



The following steps illustrate the steps in order to remove/install the two ADA panels from the unit's splash plate for service.



Removing ADA Panels

1. Twist/Rotate the ADA panel in the counterclockwise direction up to a 45° angle.
2. Carefully pull ADA panel and electric wire harness from the unit's splash plate, until the harness connector is visible.
3. Disconnect ADA harness and remove from the unit.

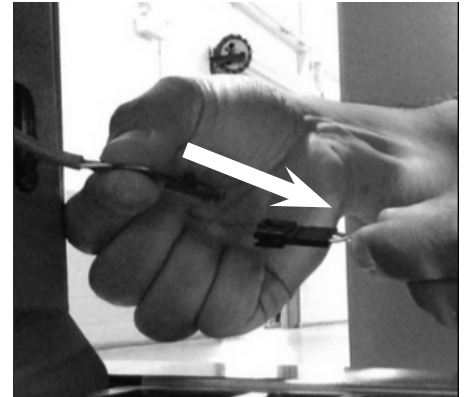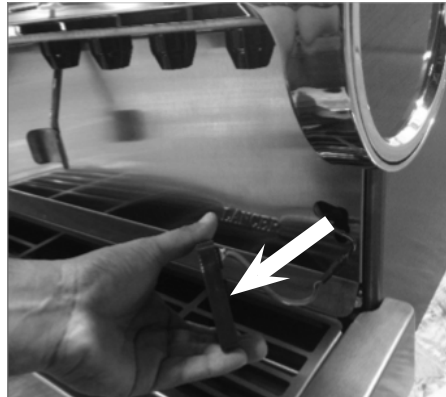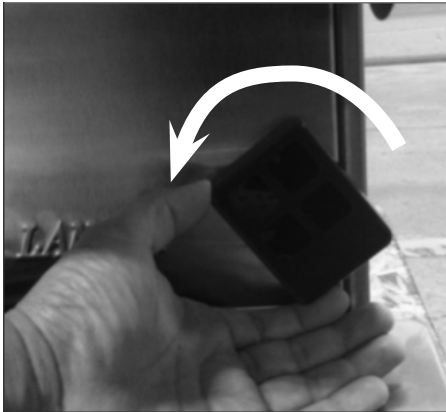

Installing ADA Panels

1. Connect ADA panel wire harness to wire harness at unit splash plate.
2. At a 45° angle, insert the two rounded features on back side of connected ADA panel into hole in splash plate.
3. Twist/Rotate ADA panel clockwise up to the vertical position to lock it into place.

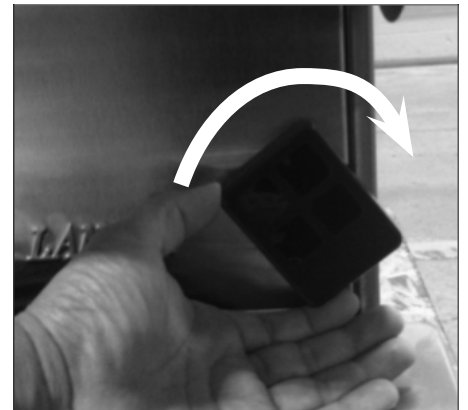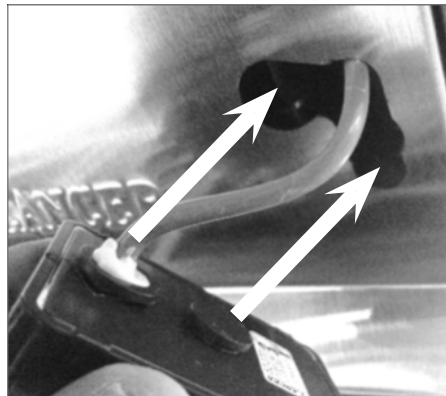

Lancer Corp., 6655 Lancer Blvd., San Antonio, Texas 78219

800-729-1500 - Technical Support/Warranty: 800-729-1550

custserv@lancercorp.com - lancercorp.com

Manual PN: 28-0949 - November 2015

"Lancer" is the registered trademark of Lancer © 2015 by Lancer, all rights reserved.