

IN THIS ISSUE:

Flavor Select (FS) Splash Plate Decal Update.....	2
ICDI Drain Fitting Update.....	3

TECHNICAL BULLETIN DISTRIBUTION

The Lancer Engineering Department publishes the Technical Bulletin every other month.

To subscribe or unsubscribe from the Tech Bulletin, go to lancercorp.com, click on the Contact link and scroll down to Technical Publications.

Lancer Installation and Service Manuals, Instruction Sheets, previous Technical Bulletins, and a complete index of Technical Bulletin articles are also available at lancercorp.com.

For general questions about the Tech Bulletin, email techpubs@lancercorp.com or call (210) 310-7230.

CONTACT INFO

Lancer Sales: (800) 729-1500

Lancer Customer Service: (800) 729-1500

Lancer Warranty: (800) 729-1550

Lancer USA: (210) 310-7000

Canada: (210) 310-7187

Latin America: (210) 310-7000

International Sales: (210) 310-7063

Europe: 32-2-755-2390

Australia/New Zealand: 61-8-8268-1388

Email: custserv@lancercorp.com

Lancer Website: www.lancercorp.com



Flavor Select (FS) Splash Plate Decal Update

Technical Bulletin Reference No. 2108-001

Beginning September 2014, PN 06-3194, the FS splash plate instruction decal will be obsolete and replaced with PN 06-3194/01. The obsolete instruction decal does not address the FS's new blend/dose capabilities, (refer to Technical Bulletin: **2102-002**). The FS's new dosing capability is an optional feature that the retailer can choose whether or not to utilize. The new instruction decal will not ship installed on the unit so that the operator can choose whether or not to include the dosing portion of the instruction decal on the unit. The updated decal will ship along with the unit in the installation kit, to be applied during installation and accommodate the operator's decision to just use the blend function of the Flavor Select or both the blend and dose functions of the unit.

Important notes:


- Instruction decal Obsolete PN 06-3194
- Instruction decal New PN 06-3194/01

BEFORE CHANGE



Pictured: Obsolete decal installed on the production line

AFTER CHANGE

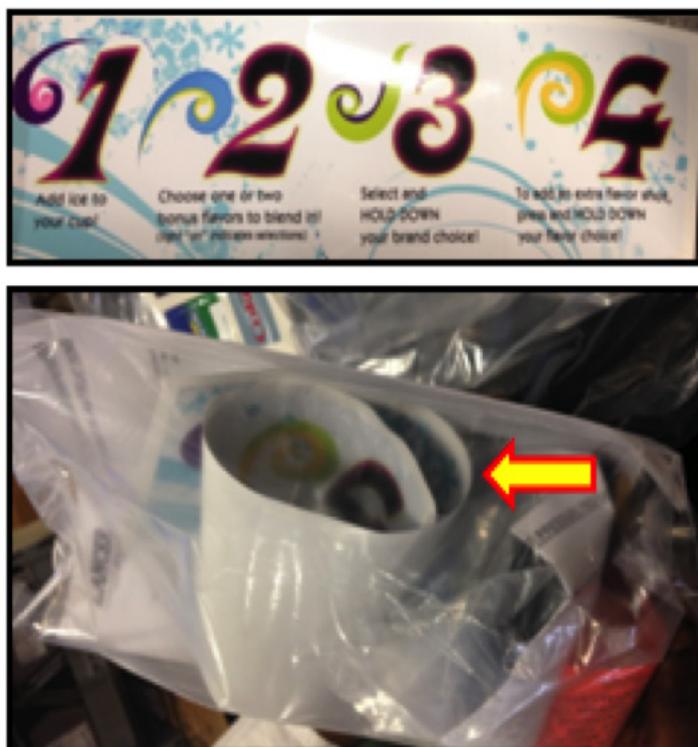

Pictured: New decal delivered uninstalled in the included installation kit

ICDI Drain Fitting Update

Technical Bulletin Reference No. 2108-002

The PVC drain fitting currently used on all Lancer Ice Cooled Drop In units that connects the drain in the cold plate with that of a drain hose which disposes the liquid from the melted ice, is expensive, has a poor chemical resistance, is prone to stress cracking, and has a low tensile strength level.

As of September 2014, Lancer will begin using a nylon based drain fitting. The nylon fitting is less expensive to, has a much higher chemical resistance, is less prone to stress cracking, and almost doubles in tensile strength. This new drain fitting will not only heighten the overall functionality of the unit, but also promotes Lancer's green initiative by switching from PVC, a less biodegradable material, to nylon, a much more eco-friendly material.



Pictured: Obsolete PVC Drain Fitting



Pictured: New Nylon Drain Fitting

	PVC	Nylon	U/M
Chemical Resistance	Poor	Good	N/A
Stress Cracking	Poor	Good	N/A
Fatigue Resistance	Poor	Good	N/A
Tensile Strenght	7,500	13,500	psi
Stiffness	481,000	500,000	psi
Toughness	1	0.9	fts-lbs/in
Electrical Insulation	544	600	v/mil